

# การเปลี่ยน Port

## Apache และ MySQL ของ xampp



อาจารย์ปฐมพงศ์ อยู่จำนงค์  
ภาควิชาพัฒนศึกษาและนวัตกรรมทางการศึกษา  
สาขาวิชาคอมพิวเตอร์ศึกษา

# 1. แก้ไข port ของ Apache

The screenshot shows the XAMPP Control Panel v3.2.1 interface. The title bar indicates it was compiled on May 7th, 2013. The main window displays a table of services and their actions. The Apache service is highlighted, and its 'Config' button is circled in red. A red arrow points from this button to a text box on the right. Below the table, a log window shows the status of the services.

Service	Module	PID(s)	Port(s)	Actions
<input type="checkbox"/>	Apache			Start Admin <b>Config</b> Logs
<input type="checkbox"/>	MySQL			Start Admin Config Logs
<input type="checkbox"/>	FileZilla			Start Admin Config Logs
<input type="checkbox"/>	Mercury			Start Admin Config Logs
<input type="checkbox"/>	Tomcat			Start Admin Config Logs

Log window content:

```
11:02:49 [Apache] Attempting to start Apache app...
11:02:50 [mysql] Attempting to start MySQL app...
11:02:51 [Apache] Status change detected: running
11:02:51 [mysql] Status change detected: running
21:10:32 [Apache] Attempting to stop Apache (PID: 3940)
21:10:32 [Apache] Attempting to stop Apache (PID: 3668)
21:10:33 [Apache] Status change detected: stopped
21:10:35 [mysql] Attempting to stop MySQL (PID: 3060)
21:10:36 [mysql] Status change detected: stopped
```

เปิดโปรแกรม xampp  
เข้าสู่หน้าต่าง Control Panel ให้คลิก  
ปุ่ม Config

XAMPP Control Panel v3.2.1 [ Compiled: May 7th 2013 ]

### XAMPP Control Panel v3.2.1

Config Netstat Shell

Service	Module	PID(s)	Port(s)	Actions
<input type="checkbox"/>	Apache			Start Admin Config Logs
<input type="checkbox"/>	MySQL			Start Admin Config
<input type="checkbox"/>	FileZilla			Start Admin Config
<input type="checkbox"/>	Mercury			Start Admin Config
<input type="checkbox"/>	Tomcat			Start Admin Config

11:02:49 [Apache] Attempting to start Apache app...  
11:02:50 [mysql] Attempting to start MySQL app...  
11:02:51 [Apache] Status change detected: running  
11:02:51 [mysql] Status change detected: running  
21:10:32 [Apache] Attempting to stop Apache (PID: 3940)  
21:10:32 [Apache] Attempting to stop Apache (PID: 3668)  
21:10:33 [Apache] Status change detected: stopped  
21:10:35 [mysql] Attempting to stop MySQL (PID: 3060)  
21:10:36 [mysql] Status change detected: stopped

- Apache (httpd.conf)
- Apache (httpd-ssl.conf)
- Apache (httpd-xampp.conf)
- PHP (php.ini)
- phpMyAdmin (config.inc.php)
- <Browse> [Apache]
- <Browse> [PHP]
- <Browse> [phpMyAdmin]

เมื่อคลิกปุ่ม Config แล้ว ให้เลือก Apache (httpd.conf)

httpd.conf - Notepad

File Edit Format View Help

```
# mutex file directory is not on a local disk or is not appropriate for some
# other reason.
#
# Mutex default:logs

#
# Listen: Allows you to bind Apache to specific IP addresses and/or
# ports, instead of the default. See also the <VirtualHost>
# directive.
#
# Change this to Listen on specific IP addresses as shown below to
# prevent Apache from glomming onto all bound IP addresses.
#
#Listen 12.34.56.78:80
Listen 80

#
# Dynamic Shared Object (DSO) Support
#
# To be able to use the functionality of a module which was built as a DSO you
# have to place corresponding `LoadModule' lines at this location so the
# directives contained in it are actually available _before_ they are used.
# Statically compiled modules (those listed by `httpd -l') do not need
# to be loaded here.
```

เมื่อปรากฏหน้าต่าง httpd.conf ให้ทำการมองหาบรรทัดที่เขียนว่า

“Listen 80”


วิธีการเปลี่ยน port คือ

ให้เปลี่ยน ตัวเลข 80 เป็นเลขอื่น เช่น

Listen 90 จากนั้นเลือก save

\*\* เมื่อทำการเปลี่ยน port แล้ว เวลาเข้า localhost ให้พิมพ์เครื่องหมาย : ตามด้วยเลข port ที่ทำการเปลี่ยน เช่น localhost:90

## 2. แก้ไข port ของ MySQL

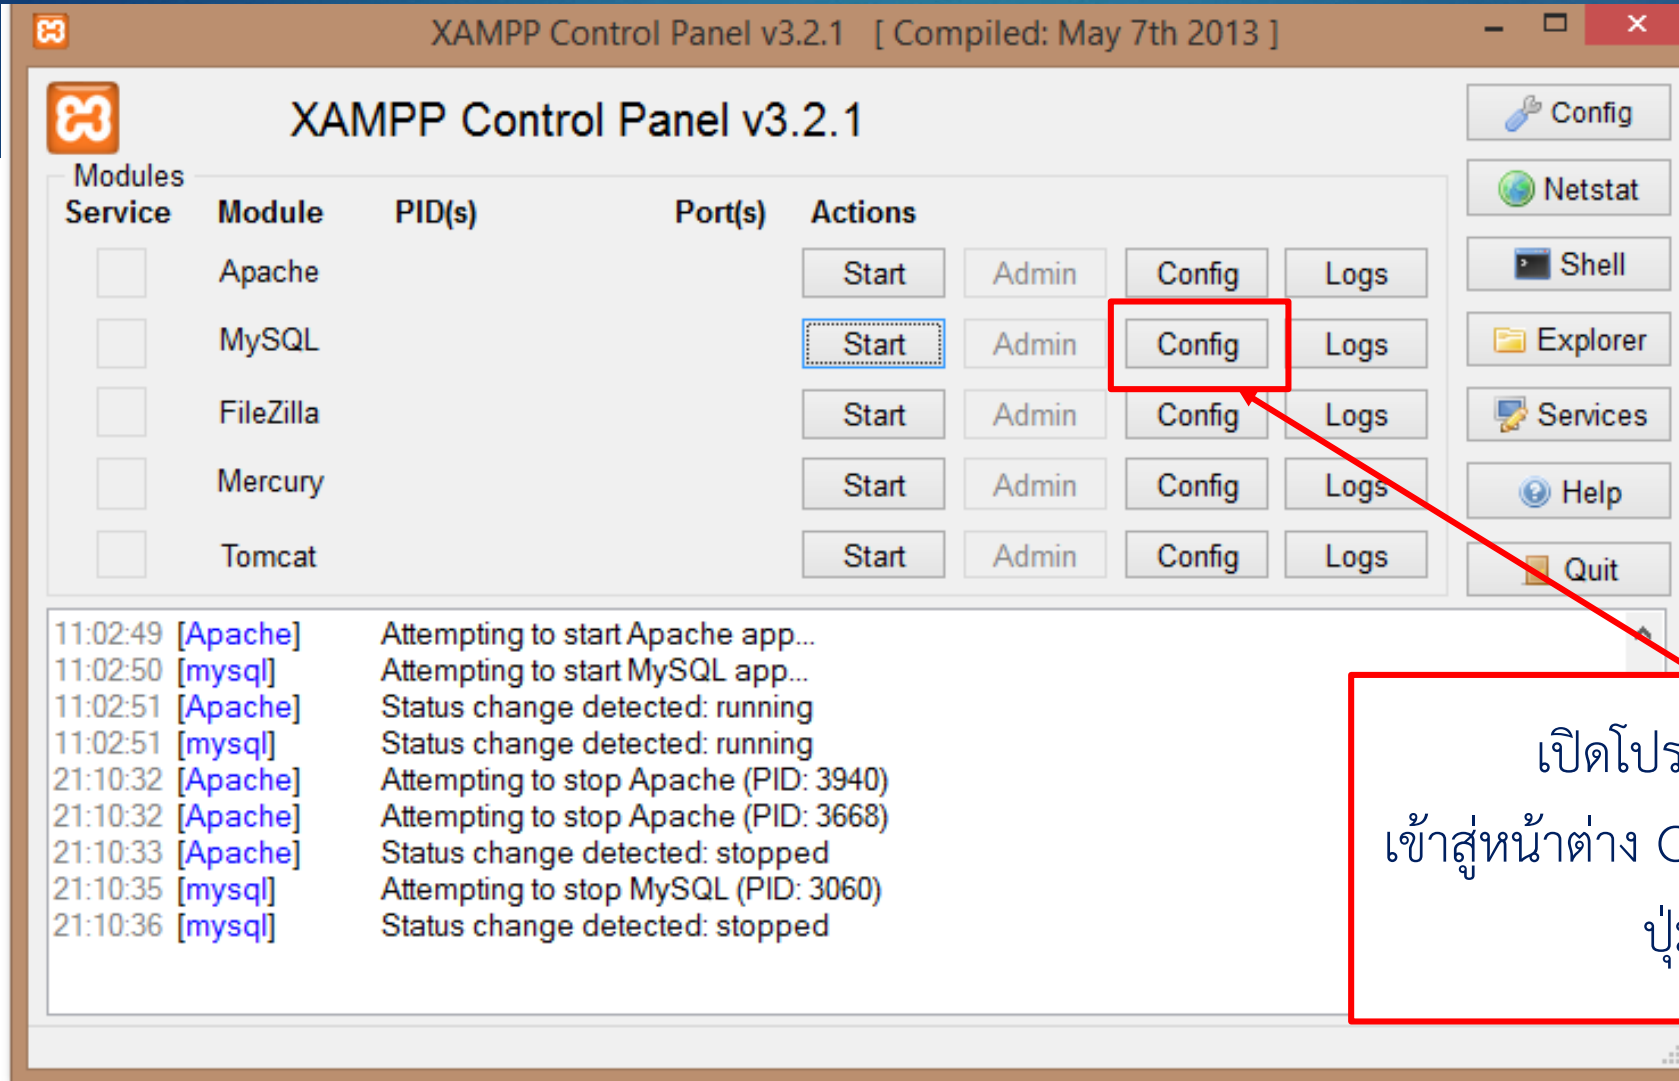

XAMPP Control Panel v3.2.1 [ Compiled: May 7th 2013 ]

XAMPP Control Panel v3.2.1

Service	Module	PID(s)	Port(s)	Actions
<input type="checkbox"/>	Apache			Start Admin Config Logs
<input type="checkbox"/>	MySQL			Start Admin <b>Config</b> Logs
<input type="checkbox"/>	FileZilla			Start Admin Config Logs
<input type="checkbox"/>	Mercury			Start Admin Config Logs
<input type="checkbox"/>	Tomcat			Start Admin Config Logs

11:02:49 [Apache] Attempting to start Apache app...  
11:02:50 [mysql] Attempting to start MySQL app...  
11:02:51 [Apache] Status change detected: running  
11:02:51 [mysql] Status change detected: running  
21:10:32 [Apache] Attempting to stop Apache (PID: 3940)  
21:10:32 [Apache] Attempting to stop Apache (PID: 3668)  
21:10:33 [Apache] Status change detected: stopped  
21:10:35 [mysql] Attempting to stop MySQL (PID: 3060)  
21:10:36 [mysql] Status change detected: stopped

Config  
Netstat  
Shell  
Explorer  
Services  
Help  
Quit

เปิดโปรแกรม xampp  
เข้าสู่หน้าต่าง Control Panel ให้คลิก  
ปุ่ม Config

XAMPP Control Panel v3.2.1 [ Compiled: May 7th 2013 ]

### XAMPP Control Panel v3.2.1

Service	Module	PID(s)	Port(s)	Actions
<input type="checkbox"/>	Apache			Start Admin Config Logs
<input type="checkbox"/>	MySQL			Start Admin <b>Config</b> Logs
<input type="checkbox"/>	FileZilla			Start Admin Config Logs
<input type="checkbox"/>	Mercury			Start Admin Config Logs
<input type="checkbox"/>	Tomcat			Start Admin Config Logs

11:02:49 [Apache] Attempting to start Apache app...  
11:02:50 [mysql] Attempting to start MySQL app...  
11:02:51 [Apache] Status change detected: running  
11:02:51 [mysql] Status change detected: running  
21:10:32 [Apache] Attempting to stop Apache (PID: 3940)  
21:10:32 [Apache] Attempting to stop Apache (PID: 3668)  
21:10:33 [Apache] Status change detected: stopped  
21:10:35 [mysql] Attempting to stop MySQL (PID: 3060)  
21:10:36 [mysql] Status change detected: stopped

my.ini  
<Browse>

เมื่อคลิกปุ่ม Config แล้ว ให้เลือก  
My.ini

```
my.ini - Notepad
File Edit Format View Help
# Example MySQL config file for small systems.
#
# This is for a system with little memory (<= 64M) where MySQL is only used
# from time to time and it's important that the mysqld daemon
# doesn't use much resources.
#
# You can copy this file to
# C:/xampp/mysql/bin/my.cnf to set global options,
# mysql-data-dir/my.cnf to set server-specific options (in this
# installation this directory is C:/xampp/mysql/data) or
# ~/.my.cnf to set user-specific options.
#
# In this file, you can use all long options that a program supports.
# If you want to know which options a program supports, run the program
# with the "--help" option.
#
# The following options will be passed to all MySQL clients
[client]
# password      = your_password
port            = 3306
socket         = "C:/xampp/mysql/mysql.sock"
# Here follows entries for some specific programs
```

เมื่อปรากฏหน้าต่าง my.ini  
มองหาบรรทัด port = 3306  
แล้วทำการเปลี่ยนตัวเลขได้เลย  
\*\*port ของ mysql จะตั้งเป็นค่า  
มาตรฐานอยู่แล้ว